


## 4MP20-5060/60-GPO/PX — Miniature Cavity Bandpass Filter

### ◆ Features:

Part Number Series: MP

- Small Size and Reduced Weight for Flight Application
- Low Profile: 0.18" Heights Typical
- Available with Center Frequencies up to 18 GHz
- Surface Mountable or Connectorize (SMP)

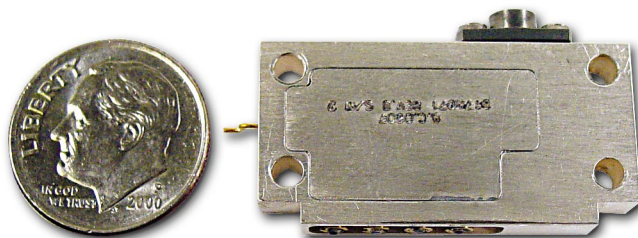

### ◆ Specifications:

Center Frequency:	5060 MHz
Bandwidth:	60 MHz
Insertion Loss In Band:	4.0 dB Max
Rejection:	50 dB @ 4710 MHz 40 dB @ 5350 MHz
Input/Output VSWR:	1.5:1
Size:	1.25 x 0.55 x 0.18
Operating Temperature:	-55 to +85 °C

### ◆ Applications:

- Military Flight



Filtering Solutions for Your Global Market

**USA**  
Phone: 410-749-2424  
FAX: 443-260-2268  
Email: sales@klmicrowave.com

**EUROPE**  
Phone: +44-(0)-1904-567355  
FAX: +44-(0)-1904-675521  
Email: sales@kleurope.com

[www.klfilterwizard.com](http://www.klfilterwizard.com) & [www.klmicrowave.com](http://www.klmicrowave.com)