

WSF-00011 AMPS Fullband Transmit Filter

◆ Features:


- High Power Handling
- Very Low Insertion Loss; <0.25 dB typical
- Symmetric Rejection on Both Sides of the Passband
- Very High Return Loss; 22 dB typical



◆ Specifications:

Passband: 869-894 MHz
 Passband Insertion Loss: 0.5 dB maximum
 Rejection:
 DC-849 MHz 40 dB minimum
 914-2682 MHz 40 dB minimum
 Passband Return Loss: 18 dB minimum
 Maximum Power Handling:
 CW 360 watts
 Peak Instantaneous 8,640 watts

Operating Temperature: 0 to +50°C
 Storage Temperature: -40 to +85°C
 Operating Humidity: 0 to 90%, non-condensing
 Dimensions: 6.6" W x 4.45" D x 3.0" H [167.6 x 113 x 76.2mm]
 Connectors: N-F

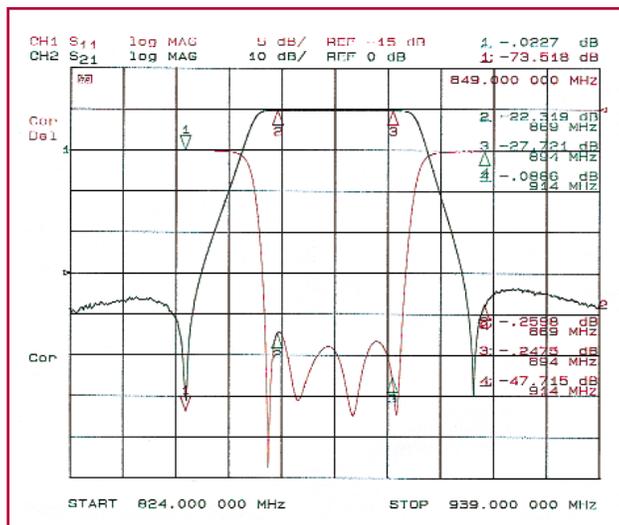

Passband Response

Filtering Solutions for Your Global Market

USA
 Phone: 410-749-2424
 FAX: 410-749-5725
 Email: sales@klmicrowave.com

EUROPE
 Phone: +44-(0)-1908-547920
 FAX: +44-(0)-1908-695284
 Email: sales@kleurope.com

Order On-Line @ www.klmicrowave.com

