


# 11LB10-312.5/XQ175-N/N High Power Bandpass

## ◆ Features:

- Type N Connectors
- 500 Watts CW Power
- Low Loss

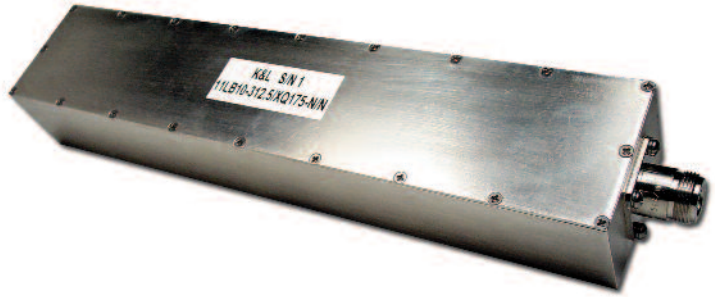


## ◆ Specifications:


Insertion Loss: @225 to 400 MHz	<0.5 dB	Dimensions:	10" x 2.0" x 1.5"
VSWR: @225 to 400 MHz	1.25:1	Environmental Specs: Shock	20 G's, 1/2 Sine, 11ms
Stopband: @100 & 525 MHz	>70 dB	Vibration	10 G's, 10 Hz-2000 Hz
Power:	500 Watts CW	Temperature	-55 to 85° C
		Relative Humidity	0-95%

## ◆ Applications:

- Mobile

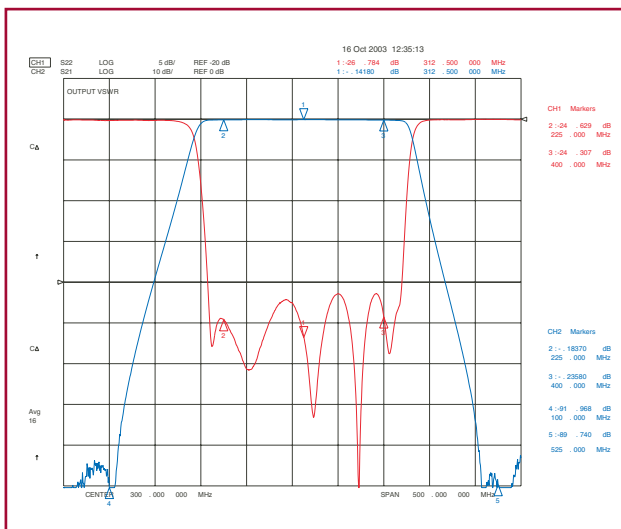

Amplitude / VSWR

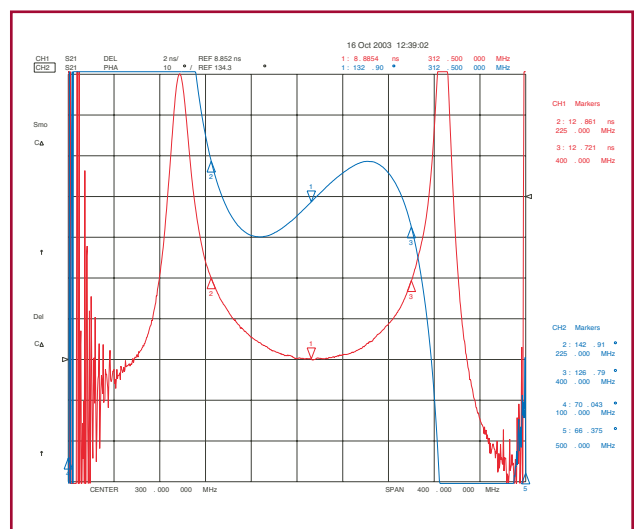

Phase / Delay