

WSN-00280 — Weather Sealed Notch Filter

◆ Features:

- Weather Resistant
- NPSPAC Notch Filter
- Elliptic Response Design; Sharp Rolloff
- High Passband Power Handling




◆ Specifications:

High Rejection:	>40 dB @ 851 MHz	Rejection:	851 - 866 MHz:	37 dB minimum
Low Loss:	1.0 dB Typical @ 846.5 MHz	869 - 891.5 MHz Power Handling:	CW:	500 Watts
Passbands:	DC - 846.5 MHz	Peak Instantaneous:	10,000 Watts	
	869 - 891.5 MHz	Operating Temperature:	-10 °C to +65 °C	
Passband Insertion Loss:		Dimensions:	12.74" D x 7.36" W x 4.28" H	(excluding connectors)
DC - 846.5 MHz:	0.65 dB maximum	Connectors:	N - F	
869 - 891.5 MHz:	0.65 dB maximum			
Passband Return Loss:	15 dB maximum			

◆ Applications:

- Eliminate interference due to close proximity of systems

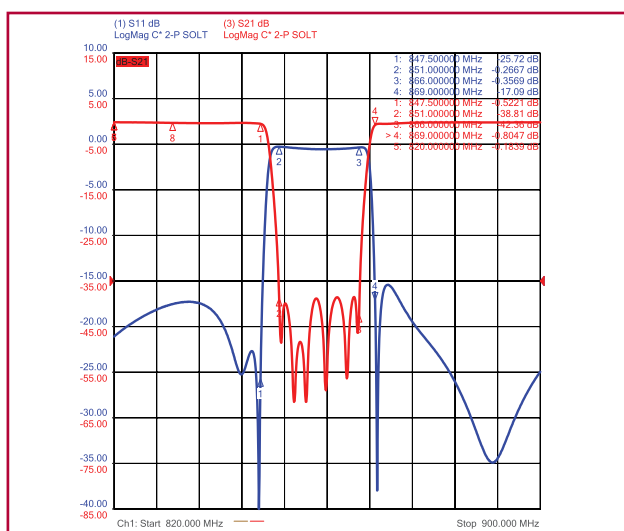

Zoom-In Response



Filtering Solutions for Your Global Market

USA
 Phone: 410-749-2424
 FAX: 443-260-2268
 Email: sales@klmicrowave.com

EUROPE
 Phone: +44-(0)-1904-567355
 FAX: +44-(0)-1904-675521
 Email: sales@kleurope.com

www.klfilterwizard.com & www.klmicrowave.com