
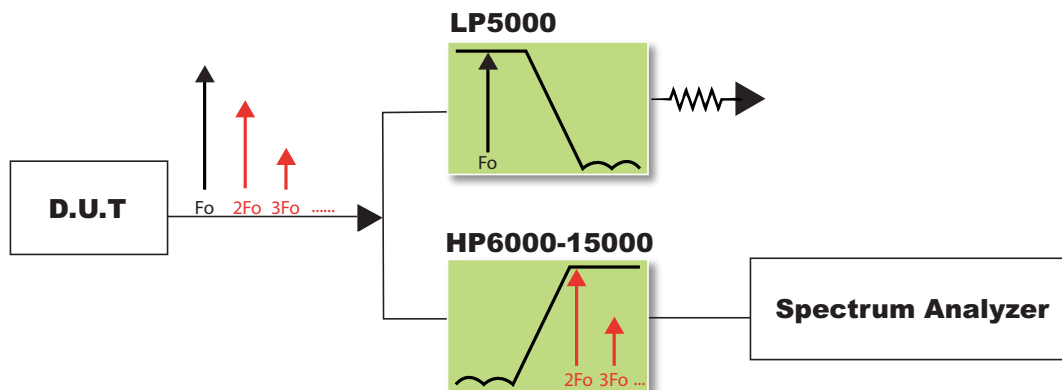


SPCL-00740 — Broadband Diplexer for Band n79

◆ Features:

- Separates the Carrier below 5000 MHz from its Harmonics up to 15000 MHz
- Prevents the Carrier from Reflecting to the D.U.T or Entering the Spectrum Analyzer

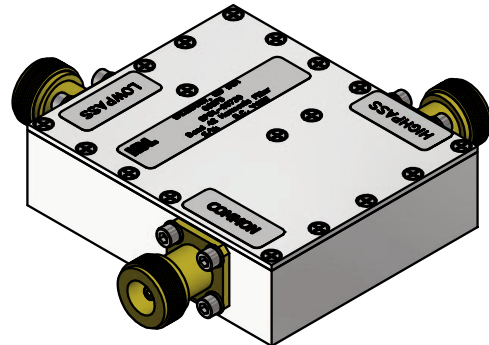

◆ Electrical Specifications

Lowpass Port	
Passband:	DC-5000 MHz
Insertion Loss:	2.0 dB max.
Return Loss:	DC-5000 MHz: -12 dB min
Rejection: LP port to Common port, Highpass Port Terminated	6000-15000 MHz: -70 dB
Power Handling: Sea level at ambient temperature, COM port 50 Ohm loaded	50 W CW max.
PIM: 2 Tones (+43) dBm each presented at common port in lowpass filter region Harmonics: 1 Tone (+43) dBm presented at common port in lowpass filter region, measured at the highpass port	Base part number: -110 dBc Base part number: (-1): -130 dBc Base part number: (-2): -156 dBc Base part number: (-3): -161 dBc






SPCL-00740 — Broadband Diplexer for Band n79

Highpass Port

Passband:	6000-15000 MHz
Insertion Loss:	2.0 dB max.
Return Loss:	-10 dB min.
Rejection:	DC-5000 MHz: -70 dB
Power Handling: Sea level at ambient temperature, COM port 50 Ohm loaded	50 W CW max.

Mechanical Specifications

RF Connectors	N-Type (F)
---------------	------------

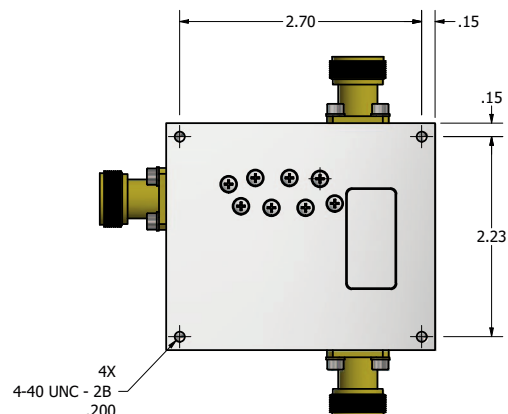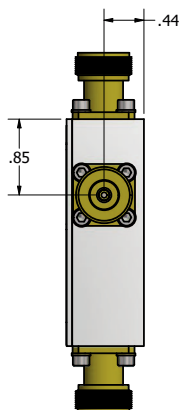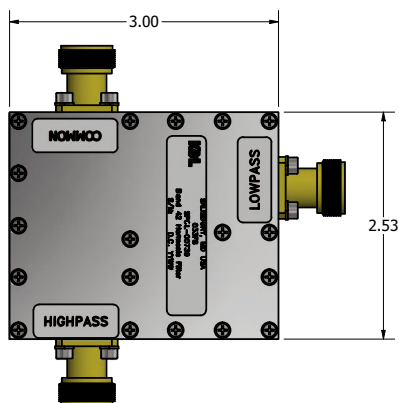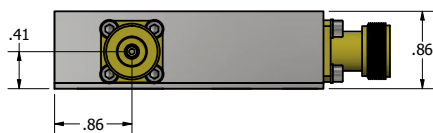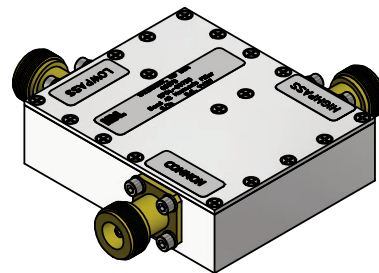

www.klmicrowave.com

Phone: 410-749-2424 • FAX: 443-260-2268

Contact: Rafi Hershtig- rhershtig@klmicrowave.com




www.klfilterwizard.com

2250 Northwood Drive
Salisbury, MD 21801

SPCL-00740 — Broadband Diplexer for Band n79


◆ Typical Frequency Response:

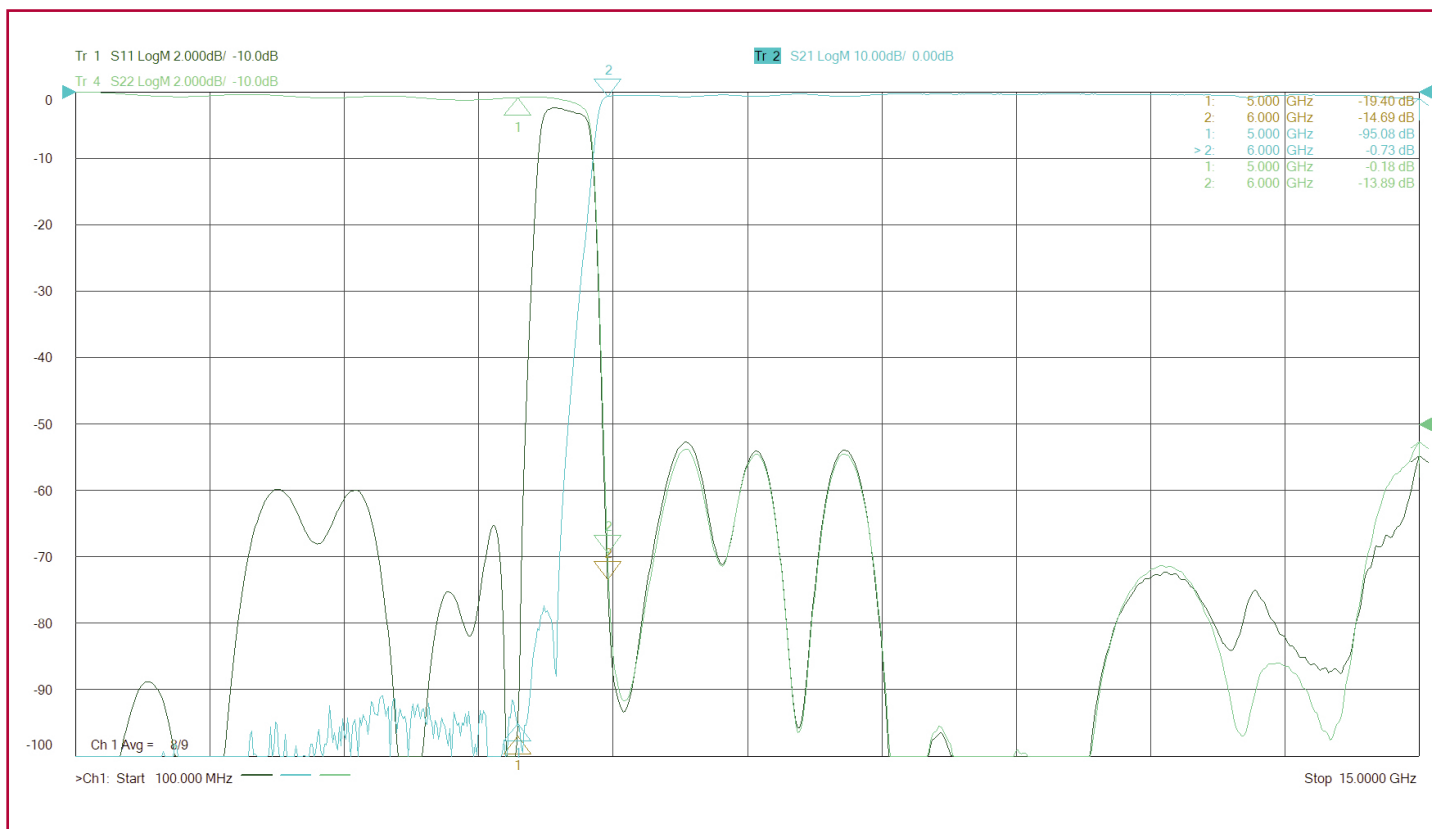

Antenna to Highpass Port

SPCL-00740 — Broadband Diplexer for Band n79

◆ Typical Frequency Response:

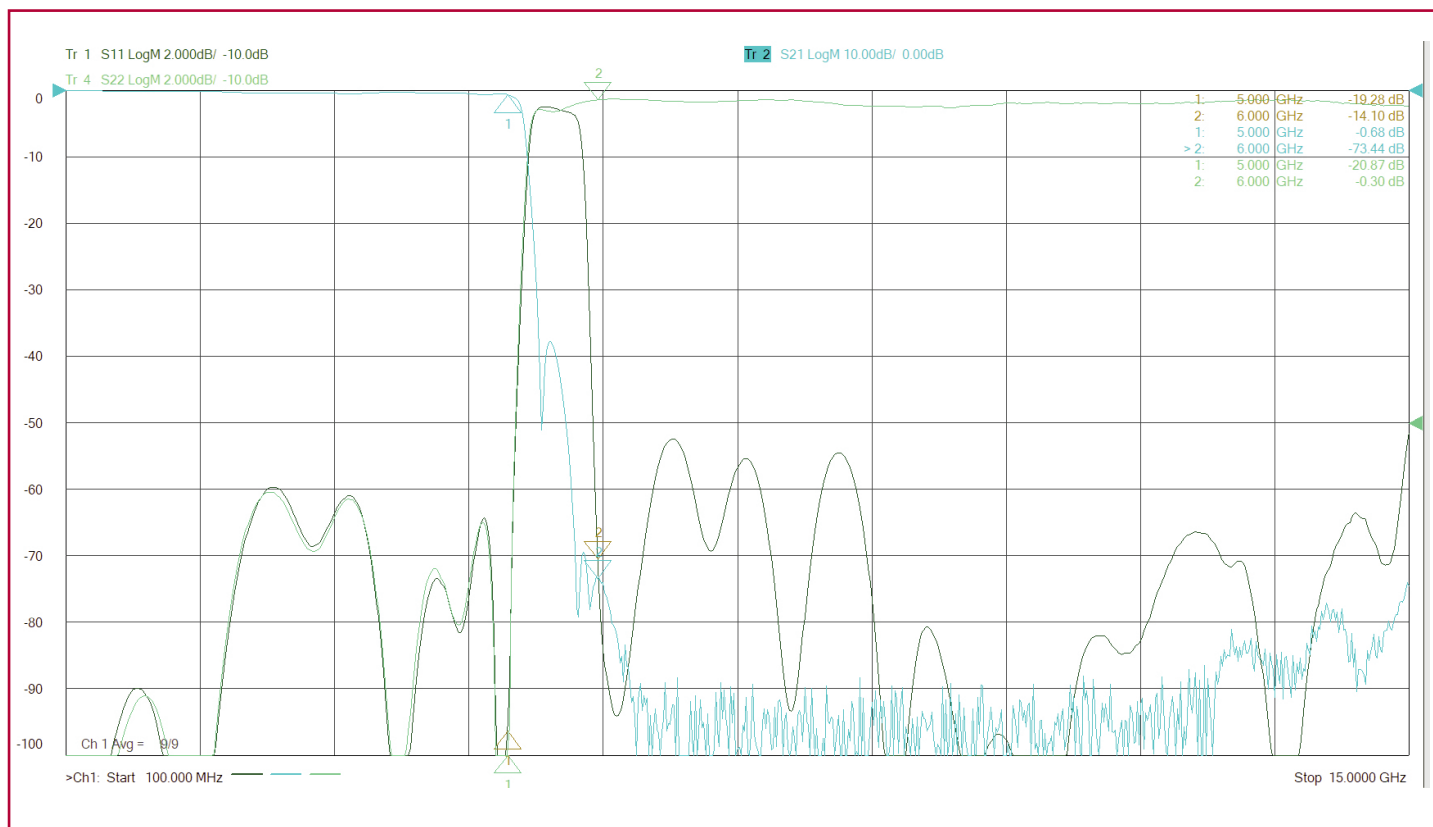

Antenna to Lowpass Port