

11SH10-11000/X18000-N/N 11 GHz Highpass

◆ Features:

- Type N Connectors
- Suspended Technology
- Plated Thru Hole Boards



◆ Specifications:

Insertion Loss
<1.0 dB: @ 11 to 18 GHz

2.0:1 VSWR across 100% of passband

Stopbands
>50 dB: @ DC to 9.3 GHz

Outline Dimensions: 1.1" x 1.0" x 1.0"

Shock: 20 G's, ½ Sine, 11Ms


Vibration: 10 G's, 10 Hz - 2000 Hz

Temperature: -55° C to 85° C


Rel. Humidity: 0 - 95%

◆ Applications:

- Radar Application (EW, ECW & ECCM)

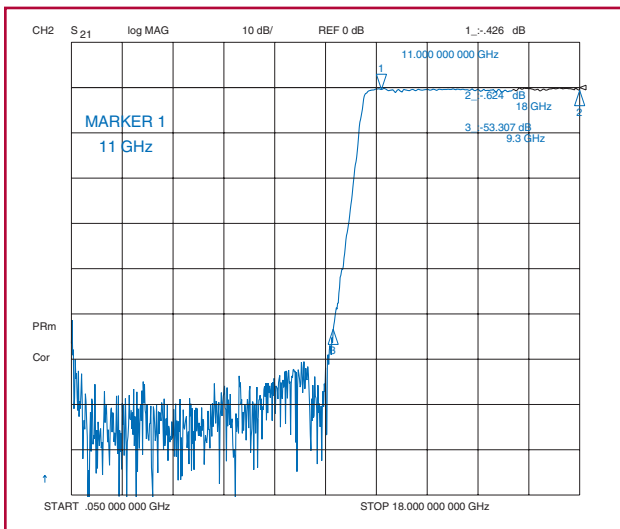

Amplitude

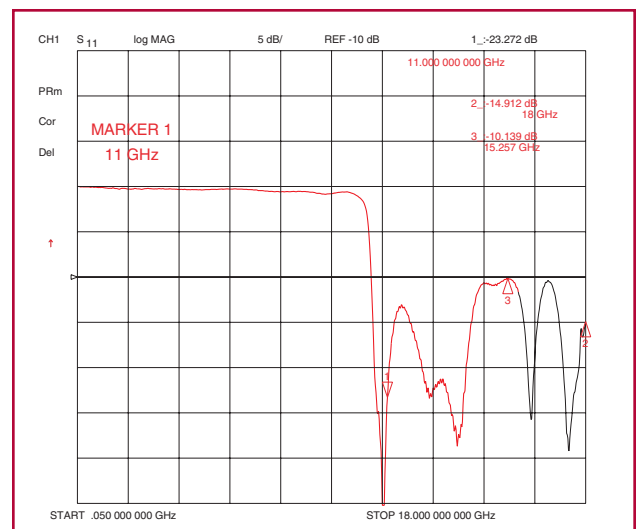

VSWR

Filtering Solutions for Your Global Market

USA

Phone: 410-749-2424
FAX: 410-749-5725
Email: sales@klmicrowave.com

EUROPE

Phone: +44-(0)-1908-547920
FAX: +44-(0)-1908-695284
Email: sales@kleurope.com

Order On-Line @ www.klmicrowave.com

