

11SB10-9000/T6000-O/OP 6 to 12 GHz Bandpass Filter

◆ Features:

- SMA Connectors
- Plated Thru Hole Boards
- Suspended Substrate Technology




◆ Specifications:


3 dB BW	6 - 12 GHz	Shock:	20 G's, 1/2 Sine, 11Ms
<1.0 dB loss @ f_0		Vibration:	10 G's, 10 Hz - 2000 Hz
1.8:1 VSWR across 100% of passband		Temperature:	-55° C to 85° C
Stopbands		Rel. Humidity:	0 - 95%
>50 dB:	@ DC - 5.1 GHz		
>50 dB:	@ 13.8 GHz - 18 GHz		

◆ Applications:

- Radio Navigation
- Military
- Wide-Band Receivers

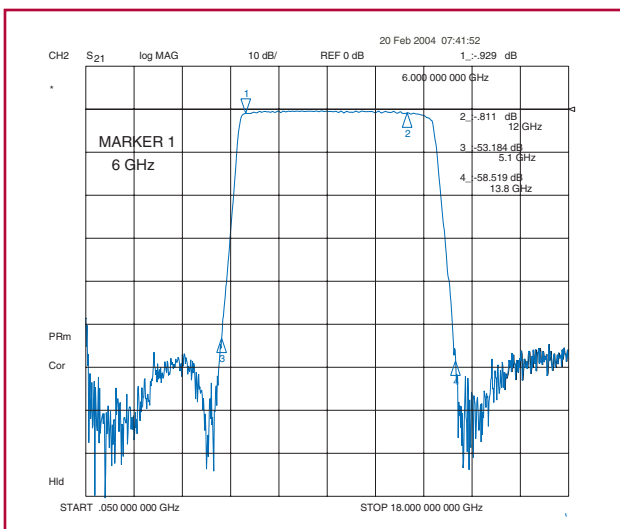

Amplitude

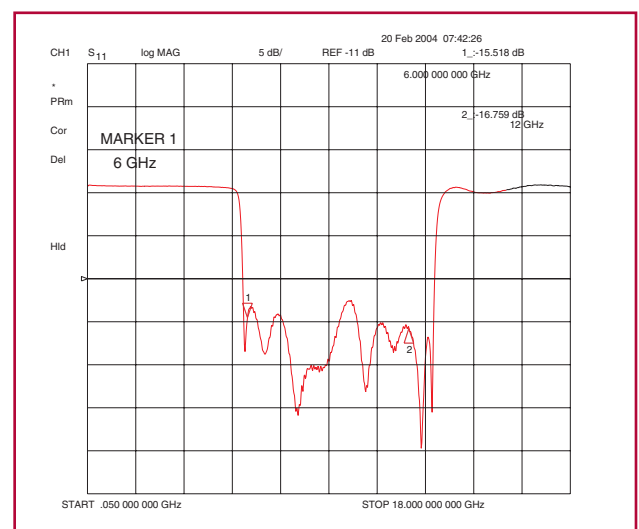

VSWR

Filtering Solutions for Your Global Market

USA

Phone: 410-749-2424
 FAX: 410-749-5725
 Email: sales@klmicrowave.com

EUROPE

Phone: +44-(0)-1908-547920
 FAX: +44-(0)-1908-695284
 Email: sales@kleurope.com

Order On-Line @ www.klmicrowave.com

