

3DL25-4950/X100 WLAN Surface Mount Dielectric Resonator

◆ Features:

- Commercial Dielectric
- Low Loss
- Small Size
- Surface Mount
- Temperature Stable




◆ Specifications:

Center Frequency:	4950 MHz	Rejection:	20 dB min. at 5250-5350 MHz
Passband:	4900-5000 MHz	Operating Temperature Range:	-40°C to +85°C
Passband Loss:	2.0 dB max.	Dimensions:	0.55"L x 0.55"W x 0.2"H
Passband VSWR:	2.0:1		

◆ Applications:

- WLAN

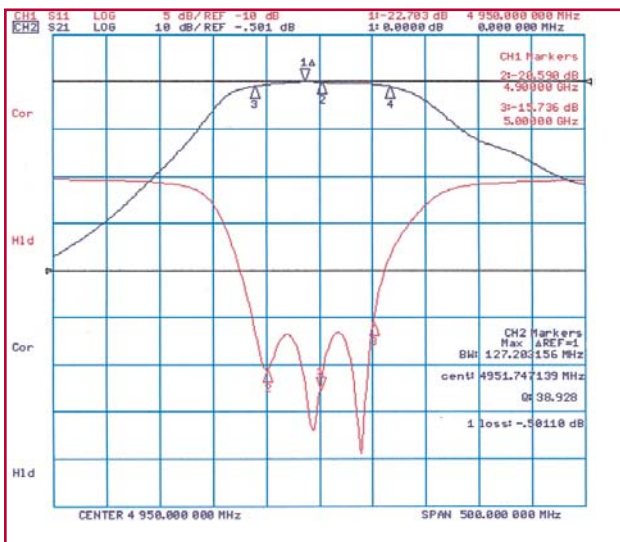

Filtering Solutions for Your Global Market

USA

Phone: 410-749-2424
FAX: 410-749-5725
Email: sales@klmicrowave.com

EUROPE

Phone: +44-(0)-1908-547920
FAX: +44-(0)-1908-695284
Email: sales@kleurope.com

Order On-Line @ www.klmicrowave.com

