

Surface Mount Terminated Diplexer

◆ Features:

- Low Profile
- Surface Mountable
- Withstands Reflow Temperatures



◆ Specifications:

Passband Return Loss:

80-870 MHz	14 dB
1165-3170 MHz	14 dB

Insertion Loss:

80-870 MHz	<0.5 dB
------------	---------


Rejection:

1165-1950 MHz	30 dB minimum
1950-6000 MHz	25 dB minimum
6000-9725 MHz	15 dB minimum


Operating Temperature: -40°C to +85°C

Storage Temperature: -65°C to +95°C

Dimensions: 0.75 W x 0.50 H x 0.30" D
(19.05 x 12.7 x 7.62mm)

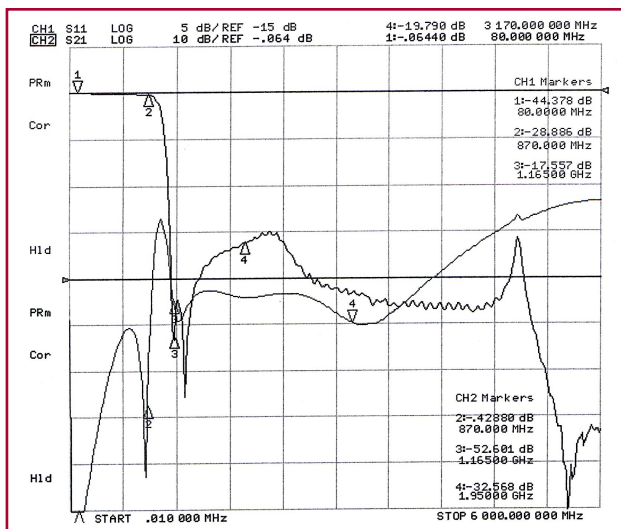

Passband & Return Loss

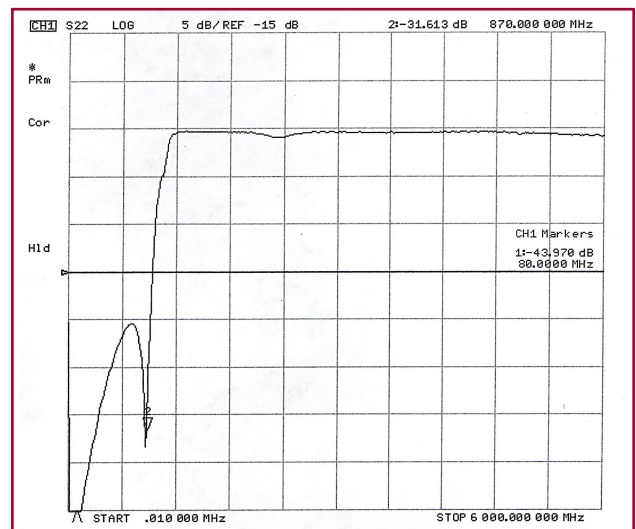

Passband

Filtering Solutions for Your Global Market

USA

Phone: 410-749-2424
FAX: 410-749-5725
Email: sales@klmicrowave.com

EUROPE

Phone: +44-(0)-1908-224746
FAX: +44-(0)-1908-224749
Email: sales@kleurope.com

Order On-Line @ www.klmicrowave.com

