


5IM10-30/XQ400-N/N Triplexer

◆ Features:

- Type N Connectors
- Power capabilities 40 W

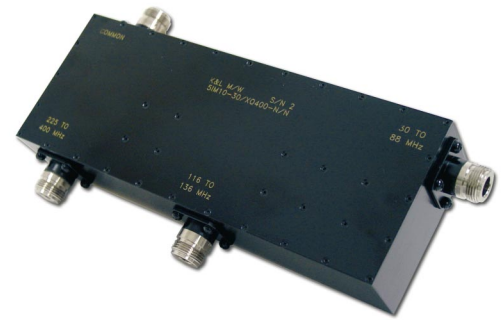

◆ Specifications:

Insertion loss:

@ 30 to 88 MHz	0.5 dB
@ 116 to 136 MHz	0.75 dB
@ 225 to 400 MHz	0.5 dB

VSWR:

1.5:1 across
passbands

Stopbands:

@ 116 Mhz	40 dB
@ 88 and 156 Mhz	40 dB
@ 136 and 174 Mhz	40 dB

Dimensions:


8.0" x 3.0" x 1.5"

Connectors:


N Females

◆ Applications:

- Broadcasting Systems
- Amateur Radio Operations
- Aeronautical Navigation

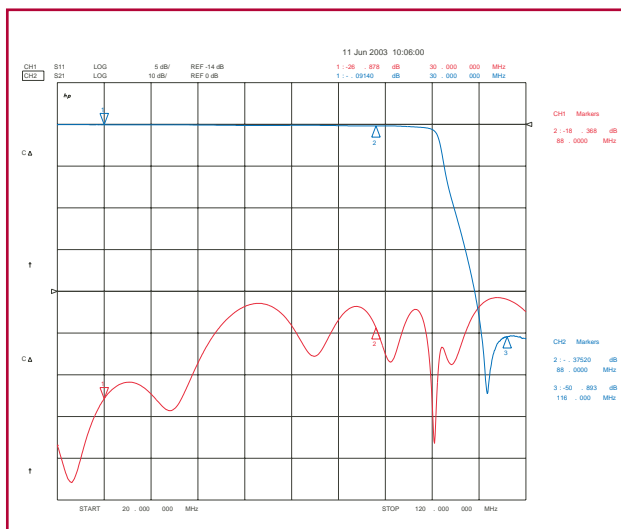

30 to 88 MHz Lowpass Filter

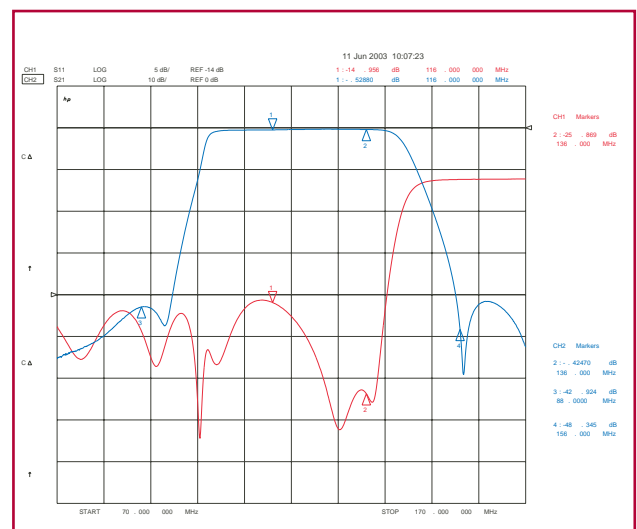

116 to 136 MHz Bandpass Filter

Filtering Solutions for Your Global Market

USA

Phone: 410-749-2424
FAX: 410-749-5725
Email: sales@klmicrowave.com


EUROPE

Phone: +44-(0)-1908-547920
FAX: +44-(0)-1908-695284
Email: sales@kleurope.com


Order On-Line @ www.klmicrowave.com



5IM10-30/XQ400-N/N Triplexer

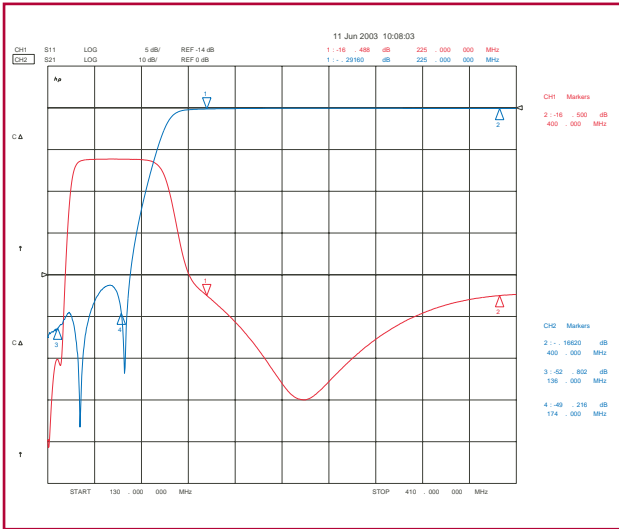

225 to 400 MHz Highpass Filter

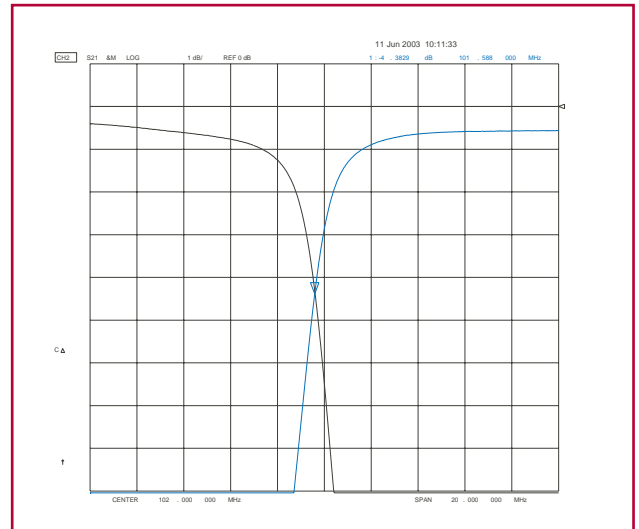

Crossover @ 102 MHz

Filtering Solutions for Your Global Market

USA
 Phone: 410-749-2424
 FAX: 410-749-5725
 Email: sales@klmicrowave.com

EUROPE
 Phone: +44-(0)-1908-547920
 FAX: +44-(0)-1908-695284
 Email: sales@kleurope.com

Order On-Line @ www.klmicrowave.com

