

6MP20-12500/T1250-P/P - Mini-Pack™

◆ Features:


- Ultra Low Profile Package
- Weight Reduction of 72% on Standard Design
- Volume Reduced by 72.5% on Standard Design
- Exceptional Ultimate Stopband Performance
- Designs from 6 to 18 GHz Available
- 4 to 10 Section Designs

◆ Specifications:


Center Frequency:	12500 MHz	Rejection at 10000 MHz:	35 dB min.
Insertion Loss at f_0 :	0.8 dB max.	Operating Temperature:	-40° C to +85° C
-3 dB Bandwidth:	1250 MHz	Dimensions:	0.995" x 0.45" x 0.17"
Return Loss:	14 dB min.	Weight:	2.2 Grams
Rejection at 9000 MHz:	35 dB min.		

◆ Applications:

- Avionic
- Radar
- High Frequency Synthesizers
- Marine
- Missile Guidance

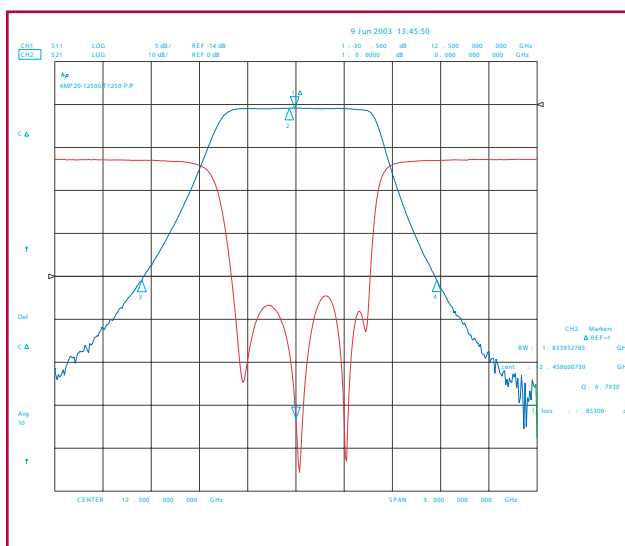

Attenuation Return Loss

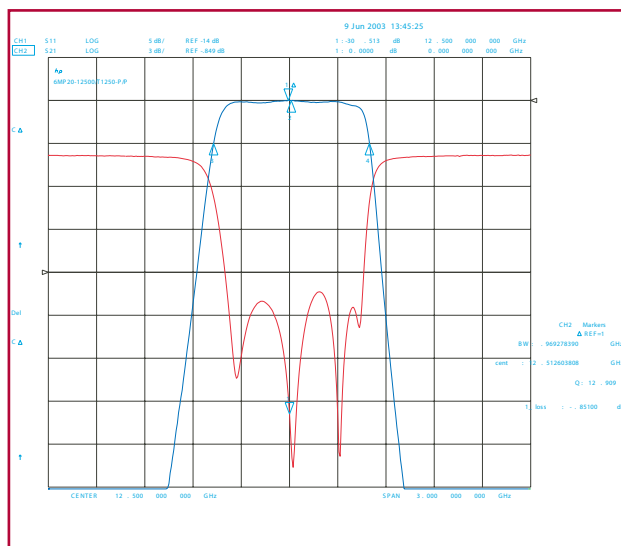

Insertion Return Loss

Filtering Solutions for Your Global Market

USA

Phone: 410-749-2424
FAX: 410-749-5725
Email: sales@klmicrowave.com

EUROPE

Phone: +44-(0)-1908-547920
FAX: +44-(0)-1908-695284
Email: sales@kleurope.com

Order On-Line @ www.klmicrowave.com

