

# 7LB50-155/X38-N/N - High Power Bandpass

## ◆ Features:

- Type N Connectors
- Power: 40 Watts
- Low Loss
- Flat Delay




## ◆ Specifications:


Insertion Loss:	<1.0 dB	Environmental Specs	
VSWR:	1.5:1 Across passband	Shock:	20 G's, 1/2 Sine, 11ms
Stopbands:	15 dB min.	Vibration:	10 G's, 10 Hz - 2000 Hz
@124 & 186 MHz	>25 dB	Temperature:	-55° C to +85° C
@112 & 198 MHz	>35 dB	Relative Humidity:	0-95%
		Dimensions:	4.5" X 1.25" X 1.0"

## ◆ Applications:

- Aeronautical Navigation
- Fixed Mobile

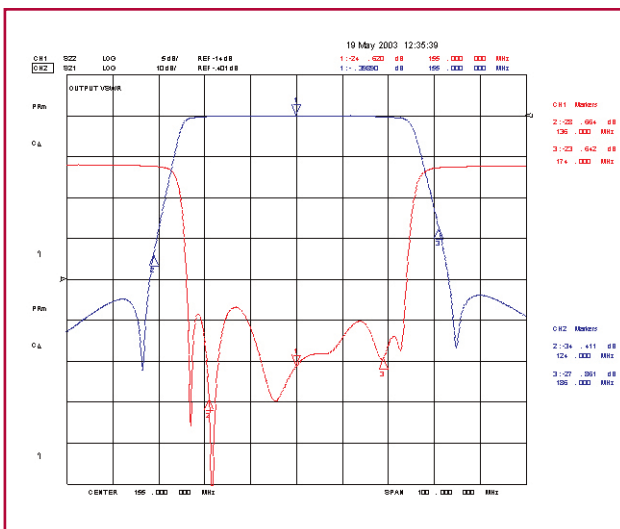

**Amplitude/VSWR Response**

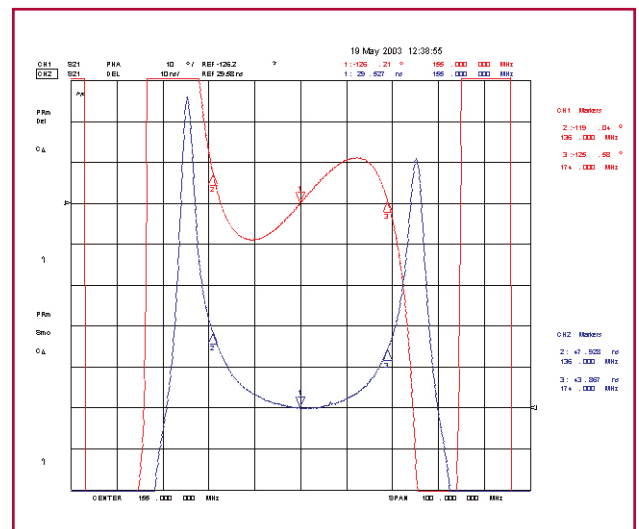

**Phase/Group Delay**

**Filtering Solutions for Your Global Market**

**USA**  
 Phone: 410-749-2424  
 FAX: 410-749-5725  
 Email: sales@klmicrowave.com

**EUROPE**  
 Phone: +44-(0)-1908-547920  
 FAX: +44-(0)-1908-695284  
 Email: sales@kleurope.com



**Order On-Line @ [www.klmicrowave.com](http://www.klmicrowave.com)**