

# 8MP20-9500/T750-P/P - Mini-Pack™

## ◆ Features:

- Ultra Low Profile Package
- Weight Reduction of 72% on Standard Design
- Volume Reduced by 72.5% on Standard Design
- Exceptional Ultimate Stopband Performance
- Designs from 6 to 18 GHz Available
- 4 to 10 Section Designs




## ◆ Specifications:


Center Frequency:	9500 MHz	Rejection at 10000 MHz:	35 dB min.
Insertion Loss at $f_0$ :	1.0 dB max.	Operating Temperature:	-40° C to +85° C
-3 dB Bandwidth:	750 MHz	Dimensions:	1.178" x 0.475" x 0.17"
Return Loss:	14 dB min.	Weight:	2.9 Grams
Rejection at 9000 MHz:	35 dB min.		

## ◆ Applications:

- Avionic
- Radar
- High Frequency Synthesizers
- Marine
- Missile Guidance

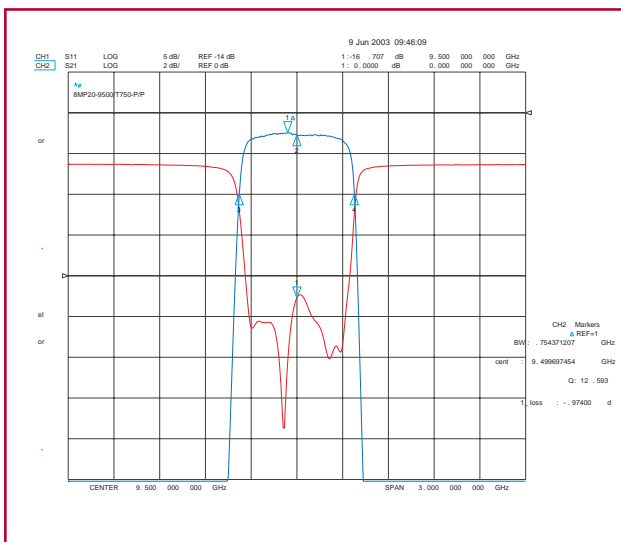

**Attenuation Return Loss**

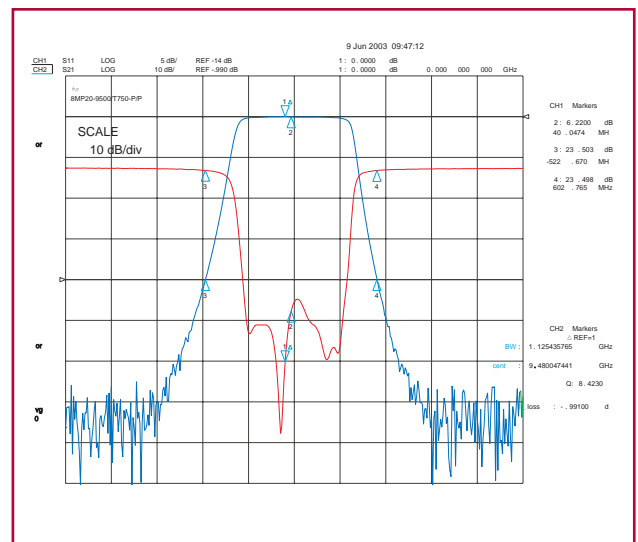

**Insertion Return Loss**

**Filtering Solutions for Your Global Market**

**USA**  
 Phone: 410-749-2424  
 FAX: 410-749-5725  
 Email: sales@klmicrowave.com

**EUROPE**  
 Phone: +44-(0)-1908-547920  
 FAX: +44-(0)-1908-695284  
 Email: sales@kleurope.com

**Order On-Line @ [www.klmicrowave.com](http://www.klmicrowave.com)**

