

WSF-0007 PCS Fullband Recieve Filter

◆ Features:

- Compact, Low Profile Design
- Low Insertion Loss <0.7 dB Typical
- Full Band, Highly Selective Performance
- Wide Operating Temperature
- High Power Handling – 200 watts CW per Channel

◆ AVAILABLE FROM STOCK

◆ Specifications:

Passband: 1850-1910 MHz

Passband Insertion Loss: 1 dB max.

Rejections

DC-1825 MHz: 60 dB min.
 1930-4000 MHz: 60 dB min.
 40000-6000 MHz: 60 dB min.

Passband Return Loss: 15 dB min.


Operating Temperature: -25° to +70°C

Storage Temperature Range: -40° to +85°C


Operating Humidity: 0 to 90%, Non-condensing

Dimensions:
 (excluding connectors): [121.7 x 58.9 x 38.1mm]

Connectors: N-F

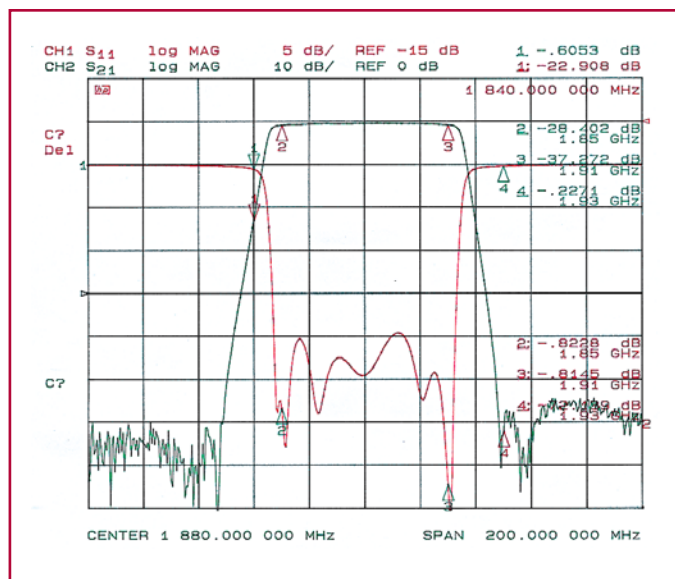

Passband Response

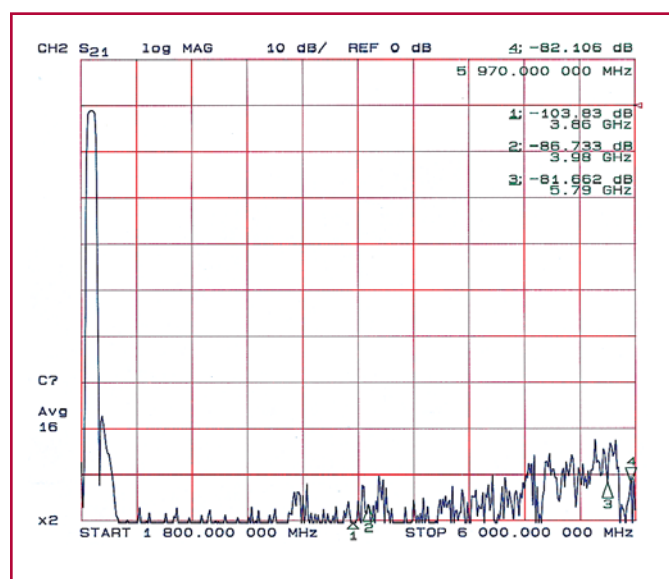

Out-of-Band Response

Filtering Solutions for Your Global Market

USA

Phone: 410-749-2424
 FAX: 410-749-5725
 Email: sales@klmicrowave.com

EUROPE

Phone: +44-(0)-1908-547920
 FAX: +44-(0)-1908-695284
 Email: sales@kleurope.com

Order On-Line @ www.klmicrowave.com



A DOVER COMPANY