

WSF-00019 PCS Fullband Receive Filter


◆ Features:

- Symmetric Rejection on Both Sides of the Passband
- Low Insertion Loss - <0.7 dB Typical
- Very High Rejection - 90 dB Typical
- High Return Loss - 22 dB Typical




◆ Specifications:

Passband:	1850 - 1910 MHz	Storage Temperature:	-40°C to +85°C
Passband Insertion Loss:	1.0 dB max.	Operating Humidity:	0 to 90%, Non-condensing
Rejection		Dimensions:	10"W x 3.46"D x 1.6"H (excluding connectors) [254 x 87.9 x 40.6mm]
DC - 1830 MHz:	80 dB min.	Connectors:	N-F
1930 - 2500 MHz:	80 dB min.		
2500 - 6000 MHz:	28 dB min.		
Passband Return Loss:	16 dB min.		
Operating Temperature:	0°C to +50°C		

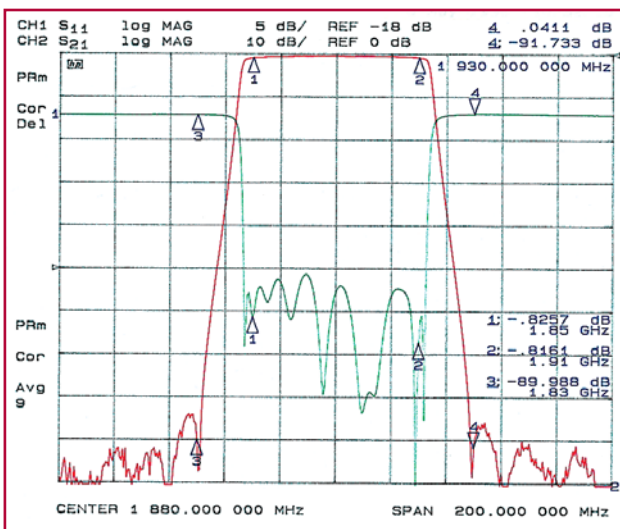

Passband Response

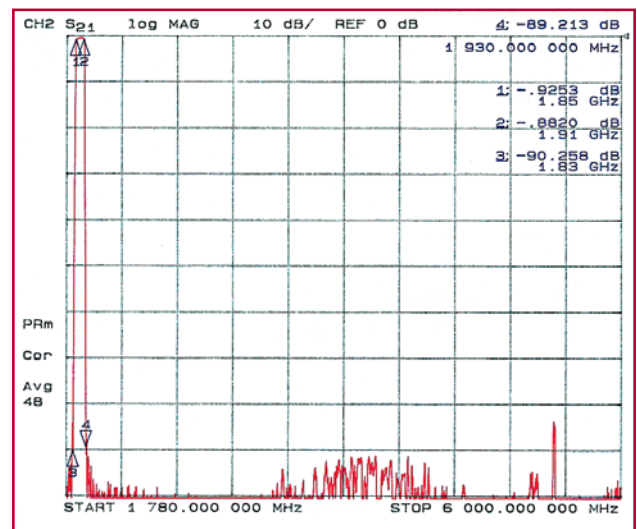

Out-of-Band Response

Filtering Solutions for Your Global Market

USA

Phone: 410-749-2424
 FAX: 410-749-5725
 Email: sales@klmicrowave.com

EUROPE

Phone: +44-(0)-1908-547920
 FAX: +44-(0)-1908-695284
 Email: sales@kleurope.com

Order On-Line @ www.klmicrowave.com

