

High Power UHF Notch Filter - WSN-00278

◆ Applications & Features:

- Protects the Receiver from a nearby Transmit Antenna
- Eliminates Unwanted Spectral Product at the Transmitter End




◆ Specifications:


Centre Frequency:	500 MHz	Dimensions:	13.2" x 5.5" x 2.4" typ
Insertion Loss:	100-490 & 510-800 MHz 1.0 dB max. (0.75 dB Typical)	Connectors:	SMA Female
Passband VSWR:	1.5:1 min.		
Rejection:	497-503 MHz; 65 dB min.		
Power Handling:	500 W CW		

◆ Frequency Response:

- Interference mitigation of a high power signal protects the receiver from de-sensitization.

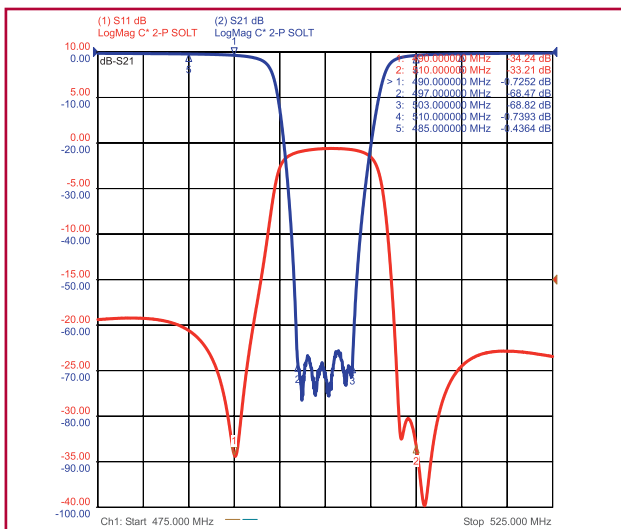

Zoom-In Response

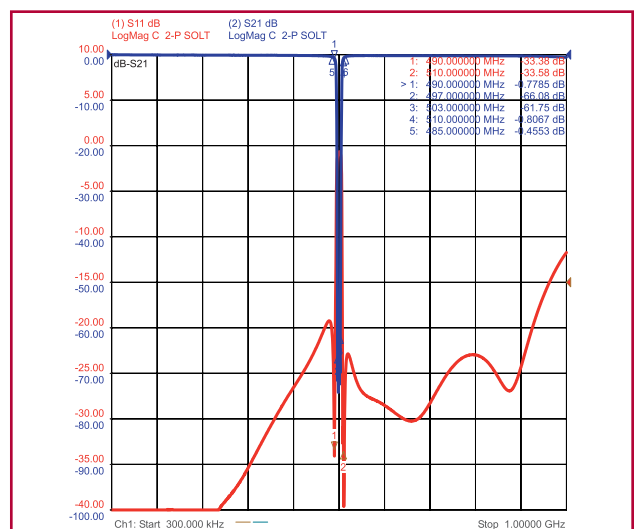

Zoom-Out Response



Filtering Solutions for Your Global Market

USA
 Phone: 410-749-2424
 FAX: 443-260-2268
 Email: sales@klmicrowave.com

EUROPE
 Phone: +44-(0)-1904-567355
 FAX: +44-(0)-1904-675521
 Email: sales@kleurope.com

www.klfilterwizard.com & www.klmicrowave.com