


# 4KCL70-512/U8500


## ◆ Features:

- Extremely small size
- Lowpass filter design
- Surface mount configuration
- Custom options available in lowpass, highpass and bandpass configurations

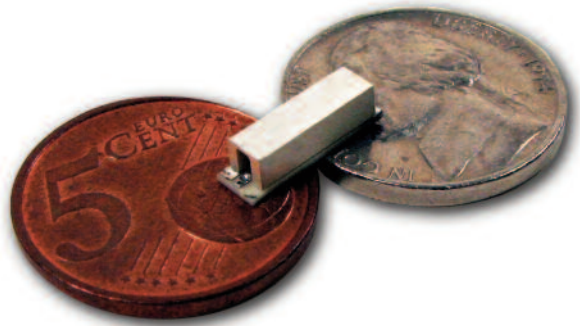


## ◆ Specifications:

- 1 dB cutoff 512 MHz
- Insertion Loss 100 to 512 MHz 1.5 dB max
- VSWR 2.0:1 100 to 512 MHz
- Attenuation 50 dB min 920 to 3000 MHz  
Attenuation 35 dB min 3000 to 8500 MHz
- Approximate Size 0.5" L x 0.16" W x .014" H Surface Mount

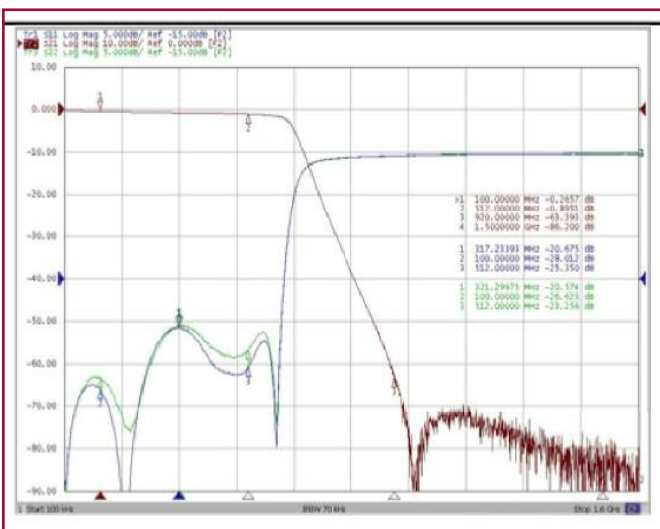

Measured Data Close in Band

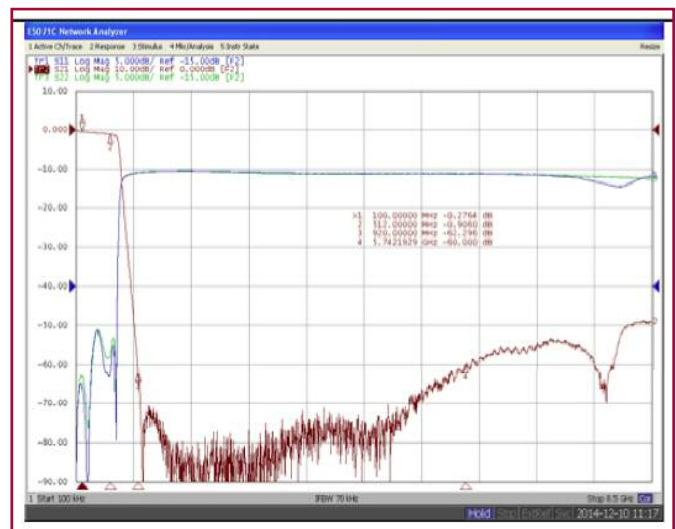

Measured Data Ultimate Rejection