

# 6LL10-400/1200-N/NP — Lowpass Filter

## ◆ Features:

- Type N Connectors
- Shape Factor 1.03:1
- Ultimate Rejection
- Low Loss


## ◆ Specifications:

Insertion Loss:	<1.0 dB
Stopbands:	15 dB min.
@412 MHz	>15 dB
@450 to 1200 MHz	>40 dB
Environmental Specs:	
Shock	20 G's, 1/2 Sine, 11ms
Vibration	10 G's, 10 Hz - 2000 Hz
Temperature	-55 to +85° C
Relative Humidity	0-95%
Dimensions:	5.0" X 1.25" X 1.0"




## ◆ Applications:

- Aeronautical Navigation

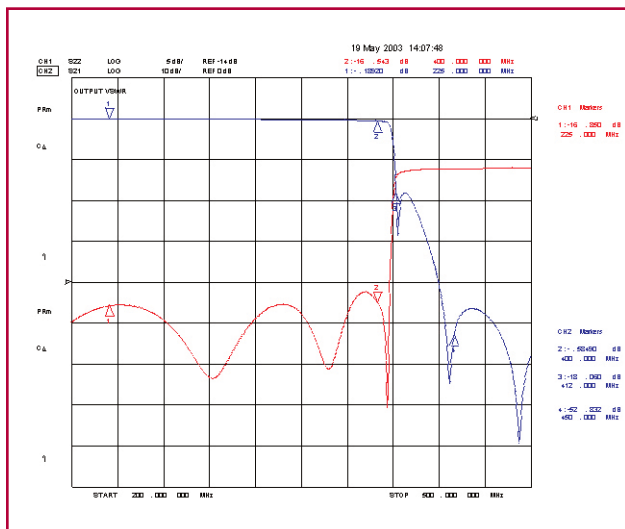

Amplitude Response

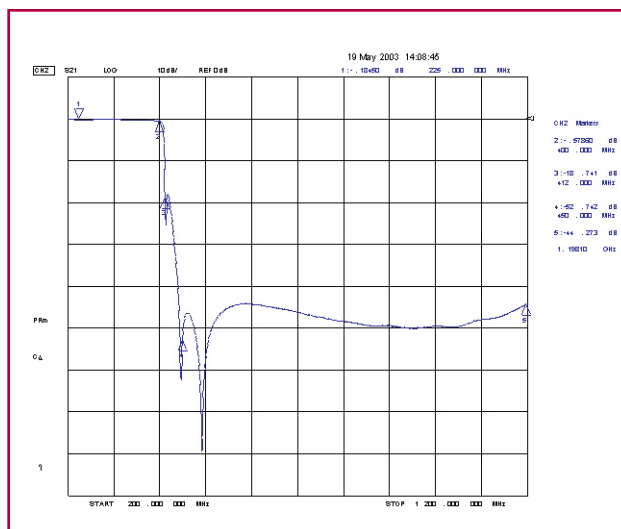

Ultimate Rejection



Filtering Solutions for Your Global Market

**USA**  
 Phone: 410-749-2424  
 FAX: 443-260-2268  
 Email: sales@klmicrowave.com

**EUROPE**  
 Phone: +44-(0)-1904-567355  
 FAX: +44-(0)-1904-675521  
 Email: sales@kleurope.com

www.klfilterwizard.com & www.klmicrowave.com